



# Electric Energy Meter

- Meter-1S-G3**
- Meter-2S-G3**
- Meter-1T-G3**
- Meter-2T-G3**

## Description

The DIN-rail mounted multifunctional electric energy meter with external current transformers (CTs) is an intelligent instrument. Designed for new energy power generation systems, such as photovoltaic grid-tied systems, microinverter systems, energy storage systems, and AC-coupled systems, it is characterized by high accuracy, small size, fast response, and easy installation.

It can sample, meter, and monitor power parameters, and transmit the data to inverters. Based on real-time power and accumulated electrical energy, it supports export management, regulates power generation, and can manage the battery charging and discharging processes. Additionally, it supports bidirectional metering. These functions can optimize the energy management of residential energy storage systems.

## Features

**01** Supports CT reverse detection and adaptive phase sequence

**03** Uses CTs with RJ45 plugs to simplify the installation process


**02** Features two CT terminals for flexible application in AC-coupled systems

**04** Compatible with 120 A/40 mA CT


# Technical Specifications

Model	Meter-1S-G3	Meter-2S-G3	Meter-1T-G3	Meter-2T-G3
<b>Basic Data</b>				
Grid type	Single-phase		Three-phase four-wire	
Rated input voltage (V)	230		3 × 230/400	
Input voltage range (V)	230±20%		3 × 230/400±20%	
Overload voltage (V)	1.2 times rating (continuous)/2 times rating (1s)			
Rated input current (A)	120			
Overload current (A)	1.2 times rating (continuous)/2 times rating (1s)			
Power consumption (VA)	<0.2			
Grid frequency (Hz)	50 (±0.5%)			
Response rate	≤100 ms (voltage, current, power) ≤1s (electrical energy)			
<b>Measurement Accuracy</b>				
Voltage	±0.5%			
Current	±0.5%			
Active power	±0.5%			
Reactive power	±0.5%			
Apparent power	±0.5%			
Active energy	Class B (split-core current transformer)			
Reactive energy	Class 2			
<b>Electromagnetic Compatibility</b>				
Electrostatic discharge immunity	Class III			
Electrical fast transient burst immunity	Class IV			
Surge (shock) immunity	Class IV			
<b>Safety</b>				
Power frequency withstand voltage (Vac)	3000, 1 min (between communication and signal input)			
Insulation resistance (MΩ)	>100 (input and output terminals to enclosure)			
<b>Communication</b>				
Interface	RS485			
Communication protocol	Modbus RTU			
Communication address range	Modbus RTU: 1-247			
Baud rate (bps)	1200-38400			
<b>Environment</b>				
Operating temperature (°C)	-40 to +70			
Storage temperature (°C)	-40 to +70			
Relative humidity	≤95%, no condensing			
Altitude (m)	≤2000			
<b>Mechanical Data</b>				
Dimensions (W × H × D [mm])	18 × 108.2 × 70			
Weight (g)	63.15			
Mounting	DIN rail			
Protection degree	IP20			

Unit: mm

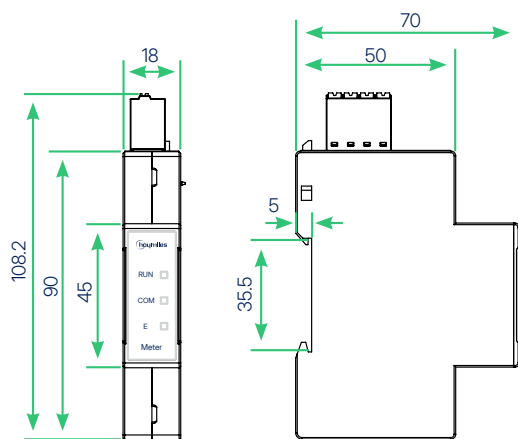

Electric Energy Meter

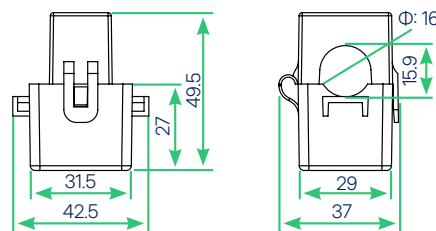

CT-120 A/40 mA